

Attachment #1
Asphalt Sealing and Overlay RFP 2022
#2022-01-045


AREA 1

Visitor Pathways BP-2 Mix (Green Area) - New Asphalt Overlay
River Camp Seating Area (Pink Area) - Seal Coating

* Coverage: approximately 2,809 square yards.

1. To ensure the new surface meets existing surfaces flush, roto-mill butt joints to approximate depth of 2" if possible, or remove existing pavement where it meets doorways, concrete aprons, dumpster pads etc. to create the smoothest transition possible.
2. Install riser rings as needed in areas that will be paved.
3. Clean loose material and vegetation from area to be paved and prime with SS-1 primer.
4. Overlay area with approximately 2 inches of compacted hot surface mix asphalt, (BP-2 mix design), blending and tapering where necessary. Roll asphalt to proper compaction with steel drum vibratory roller.
5. All areas to be barricaded before, during and after this project.

ARIEL MAP

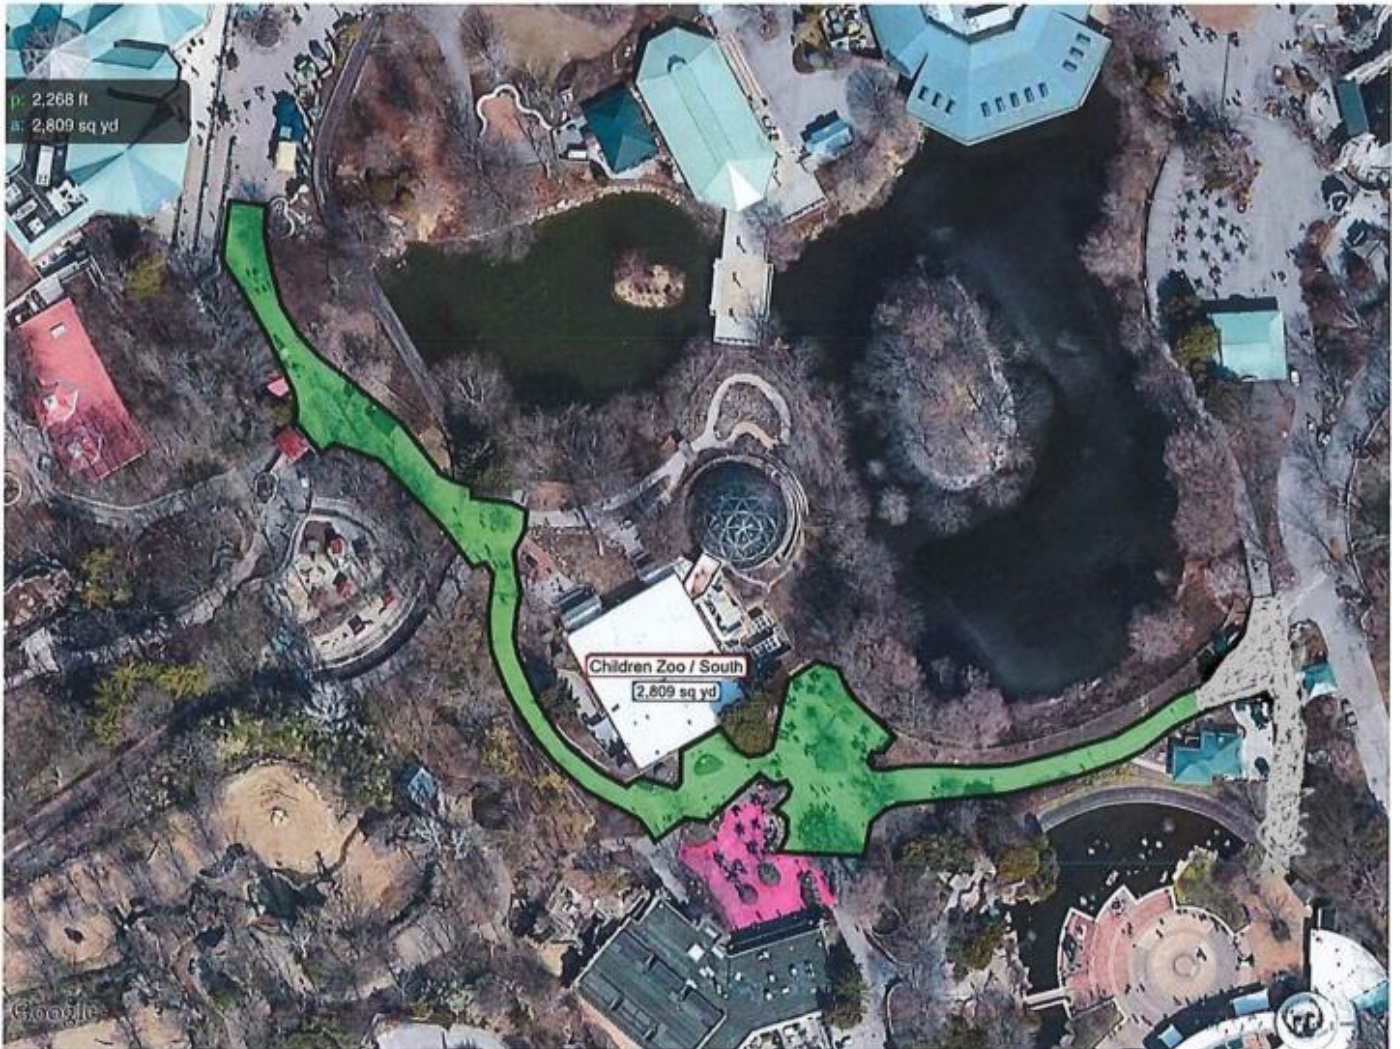

NOTES

1. Area marked as pink to be sealed with asphalt sealer.
2. Area marked in green shows location of 2 inch overlay.
3. Area marked in green should be a two day mobilization (details at Pre-Bid Meeting).
4. Work for Attachment #1 must be done September 19 - October 7, 2022.